


Premium Matt Interior Paint

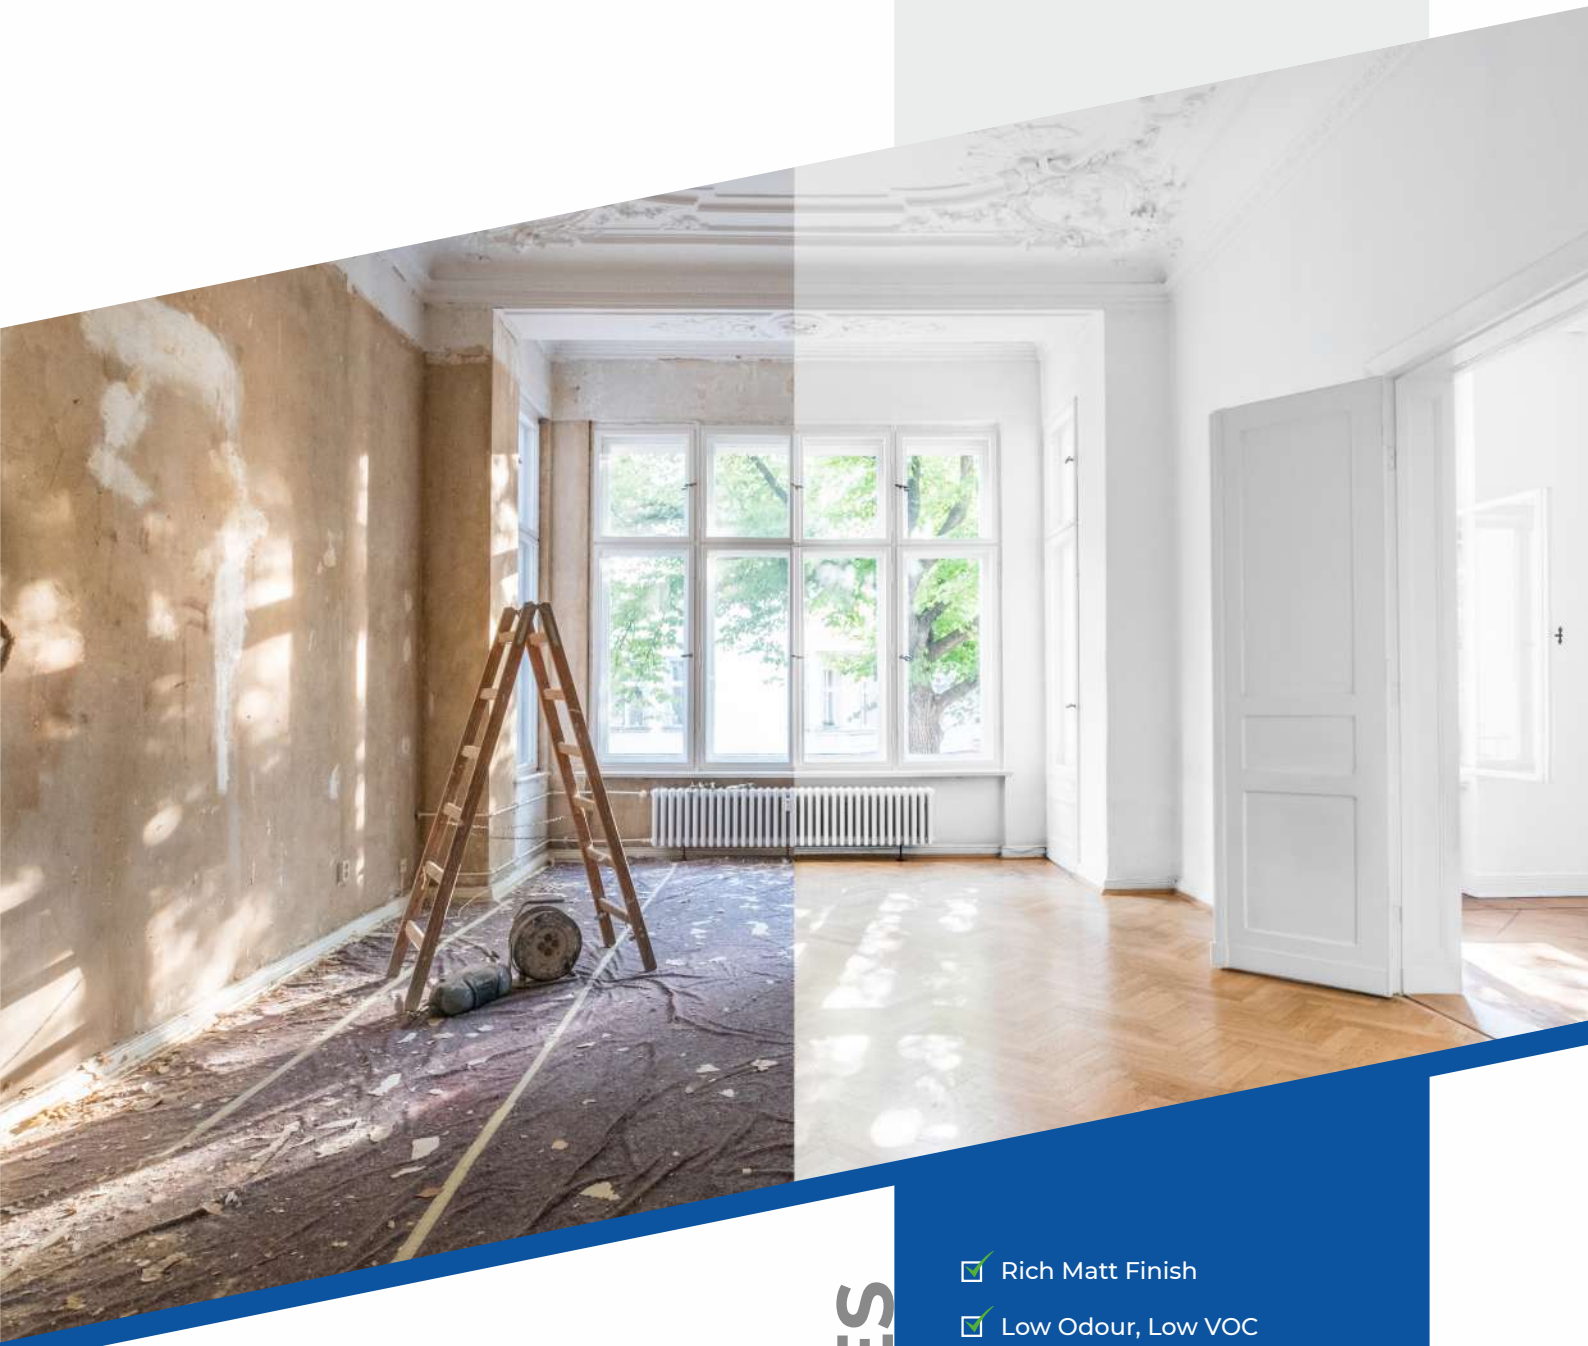

Premium Matt

Premium Matt is a premium interior silicate paint with a rich matt finish. It's inherent deep matt effect and carefully selected pigments provide unsurpassed color depth and brilliancy even in the most difficult lighting conditions. Premium Matt's ability to hide surface defects leads to an even and consistent finish even at sharp angles. The paint is extremely resistant to burnishing and mechanical abrasion making it suitable for even the most demanding high traffic interior spaces. Being highly breathable, it is extremely resistant to peel-off and blistering. Designed for excellent dirt release, it is easily washable and highly scrub resistant. Available in a wide range of colours.

FEATURES

- ✓ Rich Matt Finish
- ✓ Low Odour, Low VOC
- ✓ Breathable
- ✓ Excellent Burnish Resistance
- ✓ Anti-Fungal
- ✓ Bright Colours
- ✓ Washable
- ✓ Wide Range of Colours
- ✓ GreenPro® Certified

Toll Free:
1-800-12300-7666

www.zydexpaints.com

Premium Matt

PREMIUM MATT APPLICATION GUIDELINE

Substrate Preparation

The substrate must be sound, solid, dry, clean and free of dust and grease. Substrate and air temperature during application and drying > 5°C. Premium Matt must be applied using either brush or roller suitable for interior painting. In case of re-painting, the adhesion of the old paint must be checked using cross-hatch method. If paint is found to be non-adherent, it must be removed completely and surface must be re-prepared. In case of adherent surfaces, sand down the existing paint to roughen the surface and clean in to ensure it is free of debris. All defects and cracks should be filled using suitable repair compound. Painting with Premium Matt may now proceed. Premium Matt is not suitable for painting over metal, wood, varnishes and oil based paints.

Application

Premium Matt must be applied in principle as a two coat system diluted with water up to 30 percent. In case of patchy or inhomogeneous surfaces a third coat may be required. A minimum gap of 4 hours must be observed between subsequent coats. Cover all surfaces which are not to be painted. Please ensure that at no point is Premium Matt diluted beyond 30 percent as this may severely affect the end film properties.

Consumption

Approximately 7 m² /ltr (75 sq.ft./ltr) for 2 coats.

Consumption guideline is quoted for smooth surfaces with normal absorbency. Actual consumption may vary based on surface characteristics and is the responsibility of the applicator.

Cleaning of Equipment

Clean immediately with water after use.

Packaging and Storage

1 ltr, 4 ltr and 20 ltr.

Shelf life approximately 48 months in a cool shaded area. All unused paint must be packed in smaller air-tight containers to maintain minimum air volume.

Specifications

Density: 1.20 - 1.50 g/cm³

Gloss at 85°: < 2

Flash Point: NA

